

2020

CATALOG



**Provide Quality & Reliable Products
& Promote Users Safety**

Efficiency and Consistency, Resulting Lower Cost and Risk.

Shinohawa

Page

Industrial Plugs

• Plug	3
• Connector	6
• Wall Mounted Socket	10
• Panel Mounted Socket	14
• Interlocked Switch Socket A	17

Push Button Series	18
--------------------	----

Analog Meter

• Electromagnetic Series Moving-iron Type Square Meter	31
• Square Hz Meter	32
• Square Customized Ammeter	33
• Square Power Factor And Power Meter	34
• Magnetoelectric Series Moving-Coil Type Rectangular Meter (Improved Type)	35

GIRAFELICA

AC Axial Fan	37
Fan Filter	43

Outdoor Series

• Plug	50
• Combination Switch Socket	52
• Switch Socket	53

ELICA

Metal Cable Gland - Direct Type	60
Single Compression Type Cable Gland	61
Metal Reducer	62
Cylindrical Fuse	63

工业插头系列

Industrial plugs



概述 Outline

概述

UKS系列接插装置，是我公司根据国家相关标准和用户实际需要开发的电气产品，具有防护等级高、安全可靠、外形美观、接线方便、使用寿命长等特点。产品主要有插头、插座、连接器、附加插头、附加插座、机械连锁、低压系列、大电流系列、专用冷藏集装箱等，适用范围广泛。此系列产品改进了抓握进出便于插拔操作的设计，外部电缆紧固装置能够保护内部垫圈，带电导体的接触载体都是采用耐高温的材料，整体防护等级达到IP44或IP67，更好提高了安全性。产品广泛应用于石油、化工、冶金、电厂、煤矿、机械、轻纺、港口、码头等行业。

Outline

As per the relative standards and real needs of users, UKS series plug socket are developed with the features of high ingress protection, safety & reliability, amazing structure, easy wiring, long life time and others. The main products are plug, connector, panel mounted plug socket, wall mounted plug socket, interlocked switch socket, low-voltage series, high-current series and refrigerated container series. For the better safety performance, the improvements are performed as follows: a. the improved design of easy operation; b. inner gasket protected by external cable grip; c. high heat-resistant materials of electric contact carriers; d. Ingress protection: IP44/IP67. On the basis of these, our products are widely used in oil, chemical industry, metallurgy, power plants, coal mines, machinery, textile, ports, docks and other industries.

产品名称示意图
The Model Definition



主要技术指标 详见分类。
The main parameter, please check in the detailed classifications.

使用 **Usage**
用户需正确接入电源线，使用时，请不要带电插拔。 Please connect with power cord correctly and do not plug in/ Pull out the cive devices



维护 **Maintenance**
接插装置虽具有耐腐蚀、抗冲击的特性，但用户使用中还应保持产品表面和内部整洁，随时除去油污、水垢、灰尘和其它附着于表面的脏物。 Plug sockets are corrosion & impact resistance, and please keep the products clean and wipe the oil, scale, dust and other dirt away.

订货须知 **Order**
用户订货只须写明规格型号及订货数量即可。如有特殊要求，我们也可根据用户要求专门制作 Please specify the details and quantity when you place orders. Other requirements if there is, they could be customized for you.

产品外观
Photo



外形尺寸
Dimension

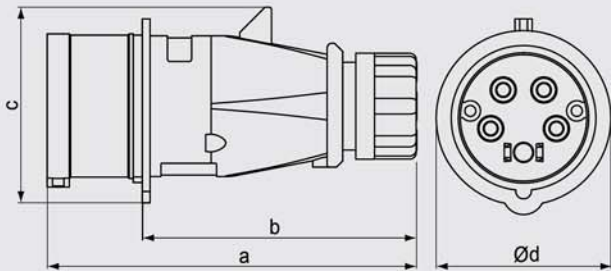

110 V 50 a. 60 Hz	230 V 50 a. 60 Hz	400 V 50 a. 60 Hz	500 V 50 a. 60 Hz	>50 - 500 V 100-300 Hz	>50 - 500 V a. 300-500 Hz
3P 4h	4P 4h	5P 4h	3P 6h	4P 9h	5P 9h
3P 9h	4P 6h	5P 6h	3P 7h	4P 7h	5P 7h
3P 10h	4P 10h	5P 10h	3P 2h	4P 2h	5P 2h

△ IP 44 CEE / IEC 插头，带螺钉接线端子，一体外壳结构
△ IP 44 CEE / IEC Plug: screwed terminals, shell of integrated structure

16	3	UKS-A134-4	UKS-A134-6	UKS-A134-9	UKS-A134-7	UKS-A134-10	UKS-A134-2
16	4	UKS-A144-4	UKS-A144-9	UKS-A144-6	UKS-A144-7	UKS-A144-10	UKS-A144-2
16	5	UKS-A154-4	UKS-A154-9	UKS-A154-6	UKS-A154-7	UKS-A154-10	UKS-A154-2
32	3	UKS-A234-4	UKS-A234-6	UKS-A234-9	UKS-A234-7	UKS-A234-10	UKS-A234-2
32	4	UKS-A244-4	UKS-A244-9	UKS-A244-6	UKS-A244-7	UKS-A244-10	UKS-A244-2
32	5	UKS-A254-4	UKS-A254-9	UKS-A254-6	UKS-A254-7	UKS-A254-10	UKS-A254-2

选型
Description

参数
Parameter



电流 (A)	Current(A)	16	32
极数 (P)	Pole (P)	3 4 5	3 4 5
尺寸	a	142 144 147	186 186 180
Dimension(mm)	b	105.2 110.5 110.5	141 141 137
	c	59 69.4 76	81 81 89.5
	d	53 59 67	70 70 77
导线横截面积(mm²)		1.5 1.5 1.5	2.5 2.5 2.5
从最小至最大		-4 -4 -4	-10 -10 -10
Conductors section (mm²)			
Min. - max.			

插头 Plug

产品外观
Photo



外形尺寸
Dimension

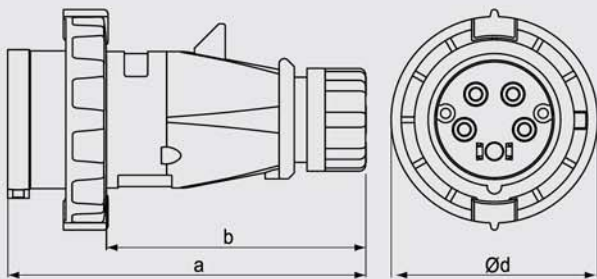

		110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100-300 Hz			>50 - 500 V a. 300-500 Hz		
电流	极数	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P
Current	Pole	4h	4h	4h	6h	9h	9h	9h	6h	6h	7h	7h	7h	10h	10h	10h	2h	2h	2h

选型
Description

⚡ IP 67 CEE / IEC 插头，带螺钉接线端子，一体外壳结构																			
⚡ IP 67 CEE / IEC Plug: screwed terminals, shell of integrated structure																			
16	3	UKS-A136-4			UKS-A136-6			UKS-A136-9			UKS-A136-7			UKS-A136-10			UKS-A136-2		
16	4	UKS-A146-4			UKS-A146-9			UKS-A146-6			UKS-A146-7			UKS-A146-10			UKS-A146-2		
16	5	UKS-A156-4			UKS-A156-9			UKS-A156-6			UKS-A156-7			UKS-A156-10			UKS-A156-2		
32	3	UKS-A236-4			UKS-A236-6			UKS-A236-9			UKS-A236-7			UKS-A236-10			UKS-A236-2		
32	4	UKS-A246-4			UKS-A246-9			UKS-A246-6			UKS-A246-7			UKS-A246-10			UKS-A246-2		
32	5	UKS-A256-4			UKS-A256-9			UKS-A256-6			UKS-A256-7			UKS-A256-10			UKS-A256-2		

参数
Parameter



电流 (A)	Current(A)	16			32		
极数 (P)	Pole (P)	3	4	5	3	4	5
尺寸	a	142	144	147	186	186	180
Dimension (mm)	b	97.2	102.5	102.5	133	133	129
	d	70	78	87	94	94	101
导线横截面积 (mm²)		1.5	1.5	1.5	2.5	2.5	2.5
从最小至最大		-4	-4	-4	-10	-10	-10
Conductors section (mm²)							
Min. - max.							

插头 Plug

产品外观
Photo



外形尺寸
Dimension

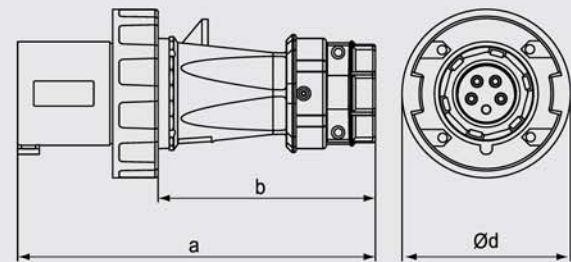

		110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100-300 Hz			>50 - 500 V a. 300-500 Hz		
电流	极数																		
Current	Pole																		
		3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	
		4h	4h	4h	6h	9h	9h	9h	6h	6h	7h	7h	7h	10h	10h	10h	2h	2h	

选型
Description

◆◆ IP 67 CEE / IEC 插头，带外部电缆紧固装置及耐高温接触载体，插销表面镀镍					
◆◆ IP 67 CEE / IEC Plug: external cable grip, highly heat resistant contact carrier, nickel plated contacts					
63	3	UKS-A336-4	UKS-A336-6	UKS-A336-9	UKS-A336-7
63	4	UKS-A346-4	UKS-A346-9	UKS-A346-6	UKS-A346-7
63	5	UKS-A356-4	UKS-A356-9	UKS-A356-6	UKS-A356-7
125	3	UKS-A436-4	UKS-A436-6	UKS-A436-9	UKS-A436-7
125	4	UKS-A446-4	UKS-A446-9	UKS-A446-6	UKS-A446-7
125	5	UKS-A456-4	UKS-A456-9	UKS-A456-6	UKS-A456-7

参数

Parameter

电流 (A)	Current(A)	63			125		
极数 (P)	Pole (P)	3	4	5	3	4	5
尺寸	a	238.3	238.3	238.3	291.1	291.1	291.1
Dimension(mm)	b	155.3	155.3	155.3	210	210	210
	d	112.2	112.2	112.2	131	131	131
导线横截面积(mm²)		6	6	6	25	25	25
从最小至最大		-25	-25	-25	-70	-70	-70
Conductors section (mm²)							
Min. - max.							

符合德国工业标准 DIN VDE 0623, 欧洲/国际标准 EN/IEC 60309-2
其它电压和频率的产品请来函询问



German industrial standard: DIN VDE 0623, European / International standard: EN / IEC 60309-2
Other requirements, please contact us freely

连接器 Connector

产品外观
Photo



外形尺寸
Dimension

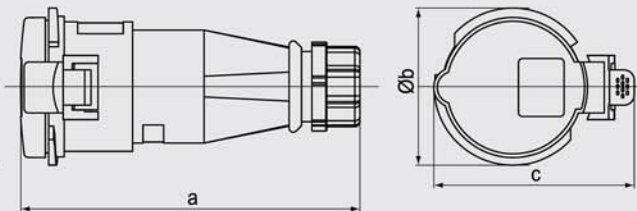

		110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100-300 Hz			>50 - 500 V a. 300-500 Hz		
电流	极数	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	
Current	Pole	4h	4h	4h	6h	9h	9h	9h	6h	6h	7h	7h	7h	10h	10h	10h	2h	2h	

选型
Description

⚠ IP 44 CEE / IEC 连接器，带螺钉接线端子，一体外壳结构																			
⚠ IP 44 CEE / IEC Connector: screwed terminals, shell of integrated structure																			
16	3	UKS-C134-4	UKS-C134-6	UKS-C134-9	UKS-C134-7	UKS-C134-10	UKS-C134-2												
16	4	UKS-C144-4	UKS-C144-9	UKS-C144-6	UKS-C144-7	UKS-C144-10	UKS-C144-2												
16	5	UKS-C154-4	UKS-C154-9	UKS-C154-6	UKS-C154-7	UKS-C154-10	UKS-C154-2												
32	3	UKS-C234-4	UKS-C234-6	UKS-C234-9	UKS-C234-7	UKS-C234-10	UKS-C234-2												
32	4	UKS-C244-4	UKS-C244-9	UKS-C244-6	UKS-C244-7	UKS-C244-10	UKS-C244-2												
32	5	UKS-C254-4	UKS-C254-9	UKS-C254-6	UKS-C254-7	UKS-C254-10	UKS-C254-2												



参数
Parameter

电流 (A)	Current (A)	16			32		
极数 (P)	Pole (P)	3	4	5	3	4	5
尺寸 Dimension (mm)	a	162	165	167	209	209	209
	b	60	68	76	82	82	82
	c	83	92	98	100	100	108
导线横截面积 (mm²)		1.5	1.5	1.5	2.5	2.5	2.5
从最小至最大 Conductors section (mm²) Min. - max.		-4	-4	-4	-10	-10	-10

产品外观
Photo



外形尺寸
Dimension

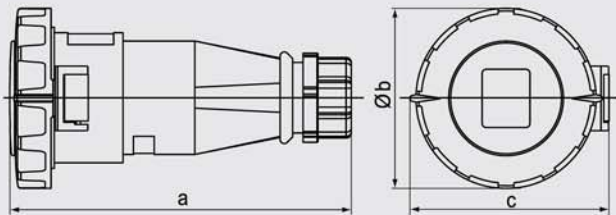

		110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100- 300 Hz			>50 - 500 V a. 300- 500 Hz		
电流	极数	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P
Current	Pole	4h	4h	4h	6h	9h	9h	9h	6h	6h	7h	7h	7h	10h	10h	10h	2h	2h	2h

♦♦ IP 67 CEE / IEC 连接器，带螺钉接线端子，一体外壳结构
♦♦ IP 67 CEE / IEC Connector: screwed terminals, shell of integrated structure

16	3	UKS-C136-4	UKS-C136-6	UKS-C136-9	UKS-C136-7	UKS-C136-10	UKS-C136-2
16	4	UKS-C146-4	UKS-C146-9	UKS-C146-6	UKS-C146-7	UKS-C146-10	UKS-C146-2
16	5	UKS-C156-4	UKS-C156-9	UKS-C156-6	UKS-C156-7	UKS-C156-10	UKS-C156-2
32	3	UKS-C236-4	UKS-C236-6	UKS-C236-9	UKS-C236-7	UKS-C236-10	UKS-C236-2
32	4	UKS-C246-4	UKS-C246-9	UKS-C246-6	UKS-C246-7	UKS-C246-10	UKS-C246-2
32	5	UKS-C256-4	UKS-C256-9	UKS-C256-6	UKS-C256-7	UKS-C256-10	UKS-C256-2

选型
Description

参数
Parameter



电流 (A)	Current (A)	16			32		
极数 (P)	Pole (P)	3	4	5	3	4	5
尺寸		146	166	172	212	212	213
Dimension (mm)	a	72	79	89	96	96	102
	b	80	88	95	98	98	105
	c	1.5	1.5	1.5	2.5	2.5	2.5
导线横截面积 (mm²)		-4	-4	-4	-10	-10	-10
从最小至最大							
Conductors section (mm²)							
Min. - max.							

连接器 Connector

产品外观
Photo



外形尺寸
Dimension

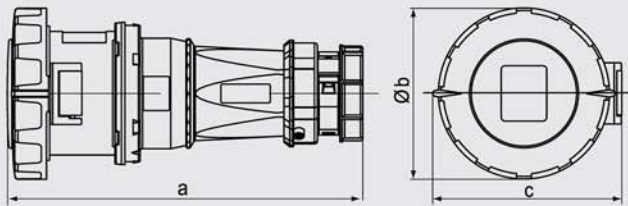

		110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100-300 Hz			>50 - 500 V a. 300-500 Hz		
电流	极数																		
Current	Pole																		
		3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	
		4h	4h	4h	6h	9h	9h	9h	6h	6h	7h	7h	7h	10h	10h	10h	2h	2h	

◆ IP 67 CEE / IEC 连接器，软接触工艺，带外部电缆紧固装置及耐高温接触载体
◆ IP 67 CEE / IEC Connector: soft-touch process, external cable grip, highly heat resistant contact carrier

63	3	UKS-C336-4	UKS-C336-6	UKS-C336-9	UKS-C336-7
63	4	UKS-C346-4	UKS-C346-9	UKS-C346-6	UKS-C346-7
63	5	UKS-C356-4	UKS-C356-9	UKS-C356-6	UKS-C356-7

选型
Description

参数
Parameter



电流 (A)	Current(A)	63		
极数 (P)	Pole (P)	3	4	5
尺寸	a	270	270	270
Dimension (mm)	b	113	113	113
	c	123	123	123
导线横截面积(mm²)		6	6	6
从最小至最大		-25	-25	-25
Conductors section (mm²)				
Min. - max.				

连接器 Connector

产品外观
Photo



外形尺寸
Dimension

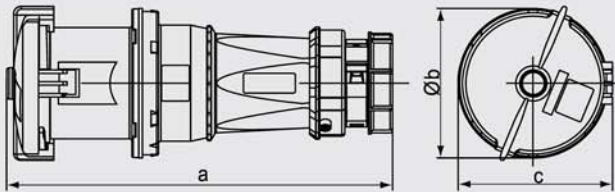

		110 V			230 V			400 V			500 V			>50 - 500 V			>50 - 500 V		
		50 a. 60 Hz			50 a. 60 Hz			50 a. 60 Hz			50 a. 60 Hz			100-300 Hz			a. 300-500 Hz		
电流	极数	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	
Current	Pole	4h	4h	4h	6h	9h	9h	9h	6h	6h	7h	7h	7h	10h	10h	10h	2h	2h	

♦♦ IP 67 CEE / IEC 连接器，软接触工艺，带外部电缆紧固装置及耐高热接触载体
♦♦ IP 67 CEE / IEC Connector: soft-touch process, external cable grip, highly heat resistant contact carrier

125	3	UKS-C436-4	UKS-C436-6	UKS-C436-9	UKS-C436-7
125	4	UKS-C446-4	UKS-C446-9	UKS-C446-6	UKS-C446-7
125	5	UKS-C456-4	UKS-C456-9	UKS-C456-6	UKS-C456-7

选型
Description

参数
Parameter



电流 (A)	Current (A)	125		
极数 (P)	Pole (P)	3	4	5
尺寸	a	310	310	310
Dimension (mm)	b	125	125	125
	c	135	135	135
导线横截面积 (mm²)		25	25	25
从最小至最大		-70	-70	-70
Conductors section (mm²)				
Min. - max.				

插座 Wall Mounted Socket

产品外观
Photo



外形尺寸
Dimension

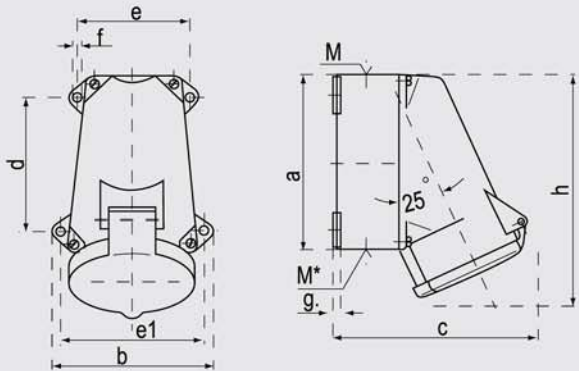

		110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100-300 Hz			>50 - 500 V a. 300-500 Hz		
电流	极数	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P
Current	Pole	4h	4h	4h	6h	9h	9h	9h	6h	6h	7h	7h	7h	10h	10h	10h	2h	2h	

选型
Description



⚠ IP 44 CEE / IEC 插座，从顶部和底部穿入电缆线 ⚠ IP 44 CEE / IEC Wall mounted socket: cable entry at the top and the bottom																			
16	3	UKS-F134-4	UKS-F134-6	UKS-F134-9	UKS-F134-7	UKS-F134-10	UKS-F134-2												
16	4	UKS-F144-4	UKS-F144-9	UKS-F144-6	UKS-F144-7	UKS-F144-10	UKS-F144-2												
16	5	UKS-F154-4	UKS-F154-9	UKS-F154-6	UKS-F154-7	UKS-F154-10	UKS-F154-2												
32	3	UKS-F234-4	UKS-F234-6	UKS-F234-9	UKS-F234-7	UKS-F234-10	UKS-F234-2												
32	4	UKS-F244-4	UKS-F244-9	UKS-F244-6	UKS-F244-7	UKS-F244-10	UKS-F244-2												
32	5	UKS-F254-4	UKS-F254-9	UKS-F254-6	UKS-F254-7	UKS-F254-10	UKS-F254-2												

参数 Parameter	电流 (A)	Current(A)	16			32		
	极数 (P)	Pole (P)	3	4	5/7	3	4	5/7
尺寸 Dimension (mm)	a		95	95	95	120	120	120
	b		102	102	102	112	112	112
	c		115	124	129	143	143	150
	d		64.2	64.2	64.2	90.2	90.2	90.2
	e		77.5	77.5	77.5	79	79	79
	e1		88	88	88	98.5	98.5	98.5
	f		5.5	5.5	5.5	5.5	5.5	5.5
	g		5	5	5	5	5	5
	h		128	128	132	160	160	160
	M		25	25	25	32	32	32
	M*		1个M 25(堵头)可剪断 1xM25 (removable)			1个M 32(堵头)可剪断 1xM32 (removable)		
	最大电缆直径(mm)		18	18	18	25	25	25
	导线横截面积(mm²)		1.5	1.5	1.5	2.5	2.5	2.5
	从最小至最大		-4	-4	-4	-10	-10	-10
	Max cable diameter (mm)							
	Conductors section (mm²)							
	Min. - max.							

符合德国工业标准 DIN VDE 0623, 欧洲/国际标准 EN/IEC 60309-2
其它电压和频率的产品请来函询问

German industrial standard: DIN VDE 0623, European / International standard: EN / IEC 60309-2
Other requirements, please contact us freely

插座 Wall Mounted Socket

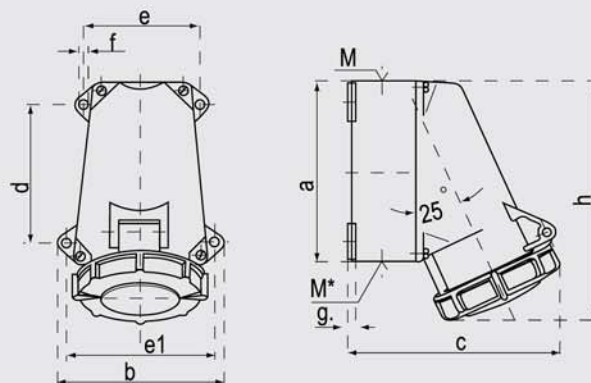产品外观
Photo外形尺寸
Dimension

电流 极数
Current Pole

110 V
50 a. 60 Hz

230 V
50 a. 60 Hz

400 V
50 a. 60 Hz

500 V
50 a. 60 Hz

>50 - 500 V
100-300 Hz

>50 - 500 V
a. 300-500 Hz

3P 4P 5P
4h 4h 4h

3P 4P 5P
6h 9h 9h

3P 4P 5P
9h 6h 6h

3P 4P 5P
7h 7h 7h

3P 4P 5P
10h 10h 10h

3P 4P
2h 2h

◆ IP 67 CEE / IEC 插座，从顶部和底部穿入电缆线
◆ IP 67 CEE / IEC Wall mounted socket: cable entry at the top and the bottom

16	3	UKS-F136-4	UKS-F136-6	UKS-F136-9	UKS-F136-7	UKS-F136-10	UKS-F136-2
16	4	UKS-F146-4	UKS-F146-9	UKS-F146-6	UKS-F146-7	UKS-F146-10	UKS-F146-2
16	5	UKS-F156-4	UKS-F156-9	UKS-F156-6	UKS-F156-7	UKS-F156-10	UKS-F156-2
32	3	UKS-F236-4	UKS-F236-6	UKS-F236-9	UKS-F236-7	UKS-F236-10	UKS-F236-2
32	4	UKS-F246-4	UKS-F246-9	UKS-F246-6	UKS-F246-7	UKS-F246-10	UKS-F246-2
32	5	UKS-F256-4	UKS-F256-9	UKS-F256-6	UKS-F256-7	UKS-F256-10	UKS-F256-2

选型
Description

参数 Parameter	电流 (A) Current(A)	16			32		
	极数 (P) Pole (P)	3	4	5/7	3	4	5/7
尺寸 Dimension (mm)	a	95	95	95	120	120	120
	b	102	102	102	112	112	112
	c	115	124	129	143	143	150
	d	64.2	64.2	64.2	90.2	90.2	90.2
	e	77.5	77.5	77.5	79	79	79
	e1	88	88	88	98.5	98.5	98.5
	f	5.5	5.5	5.5	5.5	5.5	5.5
	g	5	5	5	5	5	5
	h	128	128	132	160	160	160
	M	25	25	25	32	32	32
	M*	2个M40(堵头)可剪断 1xM25 (removable)			2个M40(堵头)可剪断 1xM32 (removable)		
	最大电缆直径(mm)	18	18	18	25	25	25
	导线横截面积(mm²)	1.5	1.5	1.5	2.5	2.5	2.5
	从最小至最大 Max cable diameter (mm) Conductors section (mm²) Min. - max.	-4	-4	-4	-10	-10	-10

符合德国工业标准 DIN VDE 0623, 欧洲/国际标准 EN/IEC 60309-2
其它电压和频率的产品请来函询问



German industrial standard: DIN VDE 0623, European / International standard: EN / IEC 60309-2
Other requirements, please contact us freely

插座 Wall Mounted Socket

产品外观
Photo



外形尺寸
Dimension

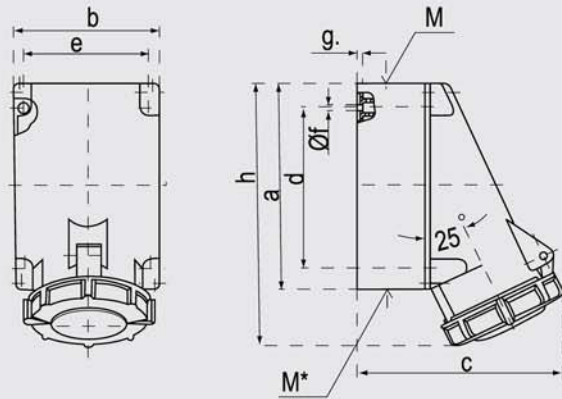

电流 Current	极数 Pole	110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100-300 Hz			>50 - 500 V a. 300-500 Hz	
		3P 4h	4P 4h	5P 4h	3P 6h	4P 9h	5P 9h	3P 9h	4P 6h	5P 6h	3P 7h	4P 7h	5P 7h	3P 10h	4P 10h	5P 10h	3P 2h	4P 2h

♦♦ IP 67 CEE / IEC 插座，软接触工艺，从顶部和底部穿入电缆线
♦♦ IP 67 CEE / IEC Wall mounted socket: soft-touch process, cable entry at the top and the bottom

63	3	UKS-F336-4	UKS-F336-6	UKS-F336-9	UKS-F336-7
63	4	UKS-F346-4	UKS-F346-9	UKS-F346-6	UKS-F346-7
63	5	UKS-F356-4	UKS-F356-9	UKS-F356-6	UKS-F356-7

选型
Description

参数 Parameter	电流 (A) Current(A)		63		
	极数 (P) Pole (P)		3	4	5
尺寸 Dimension(mm)	a		170	170	170
	b		118	118	118
	c		171	171	171
	d		134.5	134.5	134.5
	e		103	103	103
	f		6.1	6.1	6.1
	g		6	6	6
	h		216	216	216
	M		40	40	40
	M*		2个M40(堵头)可剪断 2xM40 (removable)		
	最大电缆直径(mm)		32	32	32
	导线横截面积(mm²)		6	6	6
	从最小至最大 Max cable diameter (mm)		-25	-25	-25
	Conductors section (mm²) Min. - max.				



符合德国工业标准 DIN VDE 0623, 欧洲/国际标准 EN/IEC 60309-2 German industrial standard: DIN VDE 0623, European / International standard: EN / IEC 60309-2
其它电压和频率的产品请来函询问 Other requirements, please contact us freely

插座 Wall Mounted Socket

产品外观
Photo



外形尺寸
Dimension

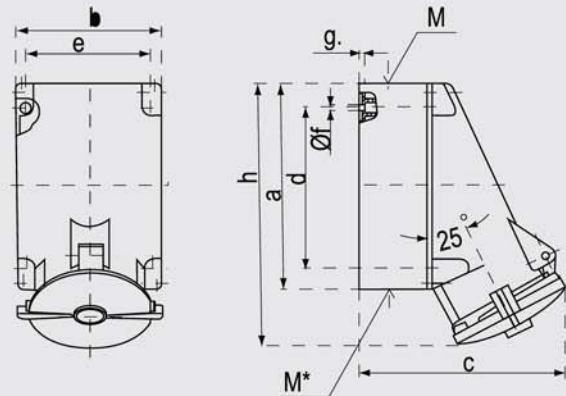

电流 Current	极数 Pole	110 V 50 a. 60 Hz	230 V 50 a. 60 Hz	400 V 50 a. 60 Hz	500 V 50 a. 60 Hz	>50 - 500 V 100- 300 Hz	>50 - 500 V a. 300- 500 Hz
		3P 4h	4P 4h	5P 4h	3P 6h	4P 9h	5P 9h
		3P 9h	4P 6h	5P 6h	3P 7h	4P 7h	5P 7h
		3P 10h	4P 10h	5P 10h	3P 2h	4P 2h	5P 2h

♦♦ IP 67 CEE / IEC 插座，软接触工艺，从顶部和底部穿入电缆线
♦♦ IP 67 CEE / IEC Wall mounted socket: soft-touch process, cable entry at the top and the bottom

125	3	UKS-F436-4	UKS-F436-6	UKS-F436-9	UKS-F436-7
125	4	UKS-F446-4	UKS-F446-9	UKS-F446-6	UKS-F446-7
125	5	UKS-F456-4	UKS-F456-9	UKS-F456-6	UKS-F456-7

选型
Description

参数 Parameter	电流 (A) Current(A)	极数 (P) Pole (P)	125
			4 5
尺寸 Dimension (mm)	a		264 264
	b		163 163
	c		203 203
	d		240 240
	e		140 140
	f		8.1 8.1
	g		8 8
	h		313 313
	M		50 50
	M*		50 50
最大电缆直径 (mm)			38 38
导线横截面积 (mm²)			25 25
从最小至最大 Max cable diameter (mm)			- 35 - 35
Conductors section (mm²)			
Min. - max.			

符合德国工业标准 DIN VDE 0623, 欧洲/国际标准 EN/IEC 60309-2
其它电压和频率的产品请来函询问



German industrial standard: DIN VDE 0623, European / International standard: EN / IEC 60309-2
Other requirements, please contact us freely

附加插座 Panel Mounted Socket

产品外观
Photo



外形尺寸
Dimension

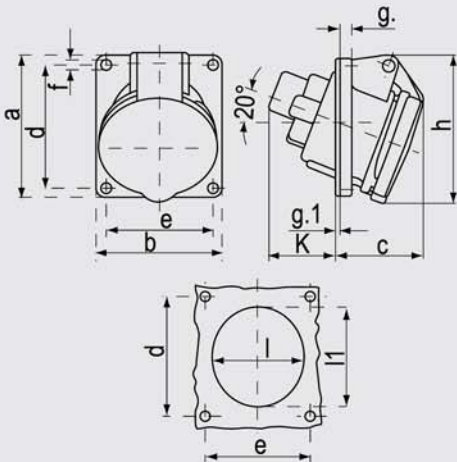

		110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100-300 Hz			>50 - 500 V a. 300-500 Hz		
电流	极数																		
Current	Pole																		
		3P 4h	4P 4h	5P 4h	3P 6h	4P 9h	5P 9h	3P 9h	4P 6h	5P 6h	3P 7h	4P 7h	5P 7h	3P 10h	4P 10h	5P 10h	3P 2h	4P 2h	

选型
Description

⚠ IP 44 法兰尺寸 73.5 x 64 毫米, (16A,3 极) 100 x 92 毫米, 向内倾斜 20°, 附加插座							
⚠ IP 44 Panel mounted socket: size of flange 73.5 x 64mm, (16A, 3 pole) 100 x 92 mm, inward tilt 20°							
16	3	UKS-B1341-4	UKS-B1341-6	UKS-B1341-9	UKS-B1341-7	UKS-B1341-10	UKS-B1341-2
16	4	UKS-B1441-4	UKS-B1441-9	UKS-B1441-6	UKS-B1441-7	UKS-B1441-10	UKS-B1441-2
16	5	UKS-B1541-4	UKS-B1541-9	UKS-B1541-6	UKS-B1541-7	UKS-B1541-10	UKS-B1541-2
32	3	UKS-B2341-4	UKS-B2341-6	UKS-B2341-9	UKS-B2341-7	UKS-B2341-10	UKS-B2341-2
32	4	UKS-B2441-4	UKS-B2441-9	UKS-B2441-6	UKS-B2441-7	UKS-B2441-10	UKS-B2441-2
32	5	UKS-B2541-4	UKS-B2541-9	UKS-B2541-6	UKS-B2541-7	UKS-B2541-10	UKS-B2541-2

参数 Parameter	电流 (A) Current(A)		16			32		
	极数 (P)	Pole (P)	3	4	5/7	3	4	5/7
尺寸 Dimension (mm)	a		73.5	100	100	100	100	100
	b		64	92	92	92	92	92
	c		52	58	58	62	62	62
	d		60	85	85	85	85	85
	e		52	77	77	77	77	77
	f		5.3	5.3	5.3	5.3	5.3	5.3
	g.		7	8	8	8	8	8
	g.1		2	2	2	2	2	2
	h		79	105	105	107	107	112
	k		41	41	41	51	51	52
	l		52	60	65	70	70	73
	ll		60	65	72	82	82	86
	导线横截面积(mm²)		1.5	1.5	1.5	2.5	2.5	2.5
从最小至最大 Conductors section (mm²) Min. - max.			- 4	- 4	- 4	- 10	- 10	- 10



符合德国工业标准 DIN VDE 0623, 欧洲/国际标准 EN/IEC 60309-2 German industrial standard: DIN VDE 0623, European / International standard: EN / IEC 60309-2
其它电压和频率的产品请来函询问 Other requirements, please contact us freely

附加插座 Panel Mounted Socket

产品外观
Photo



外形尺寸 Dimension

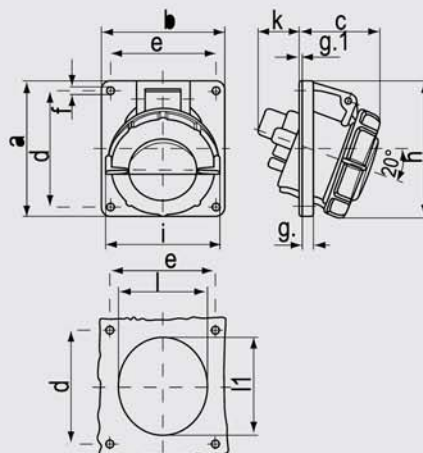

电流 Current	极数 Pole
1.5	2
2.5	2
3.5	2
4.5	2
5.5	2
6.5	2
7.5	2
8.5	2
9.5	2
10.5	2
11.5	2
12.5	2
13.5	2
14.5	2
15.5	2
16.5	2
17.5	2
18.5	2
19.5	2
20.5	2
21.5	2
22.5	2
23.5	2
24.5	2
25.5	2
26.5	2
27.5	2
28.5	2
29.5	2
30.5	2
31.5	2
32.5	2
33.5	2
34.5	2
35.5	2
36.5	2
37.5	2
38.5	2
39.5	2
40.5	2
41.5	2
42.5	2
43.5	2
44.5	2
45.5	2
46.5	2
47.5	2
48.5	2
49.5	2
50.5	2
51.5	2
52.5	2
53.5	2
54.5	2
55.5	2
56.5	2
57.5	2
58.5	2
59.5	2
60.5	2
61.5	2
62.5	2
63.5	2
64.5	2
65.5	2
66.5	2
67.5	2
68.5	2
69.5	2
70.5	2
71.5	2
72.5	2
73.5	2
74.5	2
75.5	2
76.5	2
77.5	2
78.5	2
79.5	2
80.5	2
81.5	2
82.5	2
83.5	2
84.5	2
85.5	2
86.5	2
87.5	2
88.5	2
89.5	2
90.5	2
91.5	2
92.5	2
93.5	2
94.5	2
95.5	2
96.5	2
97.5	2
98.5	2
99.5	2
100.5	2

110 V
50 a. 60 Hz

230 V
50 a. 60 Hz

400 V
50 a. 60 Hz

500 V
50 a. 60 Hz

500 V
100-
300 Hz

500 V
a. 300-
500 Hz

◆ IP 67 法兰尺寸 73.5 x 64 毫米, (16A, 3 极) 100 x 92 毫米, 向内倾斜 20°, 附加插座
◆ IP 67 Panel mounted socket: size of flange 73.5 x 64mm, (16A, 3 pole) 100 x 92 mm, inward tilt 20°

16	3	UKS-B1361-4	UKS-B1361-6	UKS-B1361-9	UKS-B1361-7	UKS-B1361-10	UKS-B1361-2
16	4	UKS-B1461-4	UKS-B1461-9	UKS-B1461-6	UKS-B1461-7	UKS-B1461-10	UKS-B1461-2
16	5	UKS-B1561-4	UKS-B1561-9	UKS-B1561-6	UKS-B1561-7	UKS-B1561-10	UKS-B1561-2
32	3	UKS-B2361-4	UKS-B2361-6	UKS-B2361-9	UKS-B2361-7	UKS-B2361-10	UKS-B2361-2
32	4	UKS-B2461-4	UKS-B2461-9	UKS-B2461-6	UKS-B2461-7	UKS-B2461-10	UKS-B2461-2
32	5	UKS-B2561-4	UKS-B2561-9	UKS-B2561-6	UKS-B2561-7	UKS-B2561-10	UKS-B2561-2

◆ IP 67 软接触工艺, 法兰尺寸 110 x 106 毫米, 向内倾斜 20°, 附加插座
◆ IP 67 Panel mounted socket: soft-touch process, size of flange 73.5 x 64mm, (16A, 3 pole) 100 x 92 mm, inward tilt 20°

63	3	UKS-B3361-4	UKS-B3361-6	UKS-B3361-9	UKS-B3361-7
63	4	UKS-B3461-4	UKS-B3461-9	UKS-B3461-6	UKS-B3461-7
63	5	UKS-B3561-4	UKS-B3561-9	UKS-B3561-6	UKS-B3561-7

选型
Description

参数
Parameter

电流(A) Current(A)		16			32			63		
极数(P) Pole(P)		3	4	5/7	3	4	5/7	3	4	5
尺寸 Dimension(mm)	a	73.5	100	100	100	100	100	110	110	110
	b	64	92	92	92	92	92	106	106	106
	c	52	59	62	64	64	66	85	85	85
	d	60	85	85	85	85	85	85	85	85
	e	52	77	77	77	77	77	77	77	77
	f	5.3	5.3	5.3	5.3	5.3	5.3	6.2	6.2	6.2
	g	7	8	8	8	8	8	12	12	12
	g.1	2	2	2	2	2	2	2	2	2
	h	84	103	105	109	109	113	125	125	125
	i	78	85	96	103	103	110	117	117	117
	k	41	35	35	54	54	54	69	69	69
	l	52	60	65	70	70	73	90	90	90
	ll	60	65	72	82	82	86	103	103	103
导线横截面积(mm ²)		1.5	1.5	1.5	2.5	2.5	2.5	6	6	6
从最小至最大 Conductors section (mm ²) Min. - max.		-4	-4	-4	-10	-10	-10	-25	-25	-25

符合德国工业标准 DIN VDE 0623, 欧洲/国际标准 EN/IEC 60309-2
其它电压和频率的产品请来函询问



German industrial standard: DIN VDE 0623, European / International standard: EN / IEC 60309-2
Other requirements, please contact us freely

附加插座 Panel Mounted Socket

产品外观
Photo



外形尺寸
Dimension

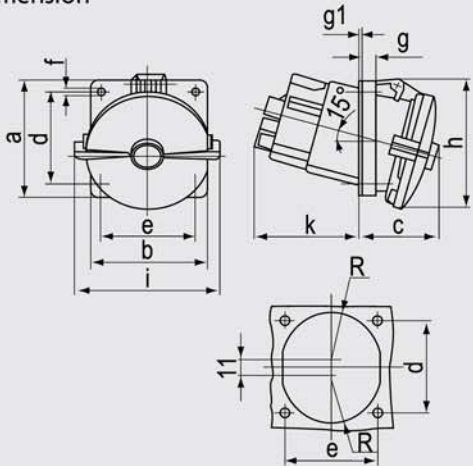

		110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			>50 - 500 V 100-300 Hz			>50 - 500 V a. 300-500 Hz		
电流	极数																		
Current	Pole	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P	3P	4P	5P
		4h	4h	4h	6h	9h	9h	9h	6h	6h	7h	7h	7h	10h	10h	10h	2h	2h	2h

选型
Description

♦♦ IP 67 笼式弹簧接触工艺, 法兰尺寸 114X110 毫米, 向内倾斜 15°, 附加插座																			
♦♦ IP 67 Panel mounted socket: cage-clamp touch process, size of flange 114 x 110mm, inward tilt 15°																			
125	3	UKS-B4361-4	UKS-B4361-6	UKS-B4361-9	UKS-B4361-7														
125	4	UKS-B4461-4	UKS-B4461-9	UKS-B4461-6	UKS-B4461-7														
125	5	UKS-B4561-4	UKS-B4561-9	UKS-B4561-6	UKS-B4561-7														

参数 Parameter	电流 (A) Current(A)		125		
	极数 (P) Pole (P)		3	4	5
尺寸 Dimension (mm)	a		114	114	114
	b		110	110	110
	c		85	85	85
	d		90	90	90
	e		90	90	90
	f		6.2	6.2	6.2
	g		13	13	13
	g.1		2	2	2
	h		135	135	135
	i		135	135	135
	k		103	103	103
	R		47	47	47
	导线横截面积(mm²)		25	25	25
	从最小至最大		-70	-70	-70
	Conductors section (mm²)				
	Min. - max.				

符合德国工业标准 DIN VDE 0623, 欧洲/国际标准 EN/IEC 60309-2
其它电压和频率的产品请来函询问



German industrial standard: DIN VDE 0623, European / International standard: EN / IEC 60309-2
Other requirements, please contact us freely

机械联锁A Interlocked Switch Socket A

产品外观
Photo



外形尺寸
Dimension

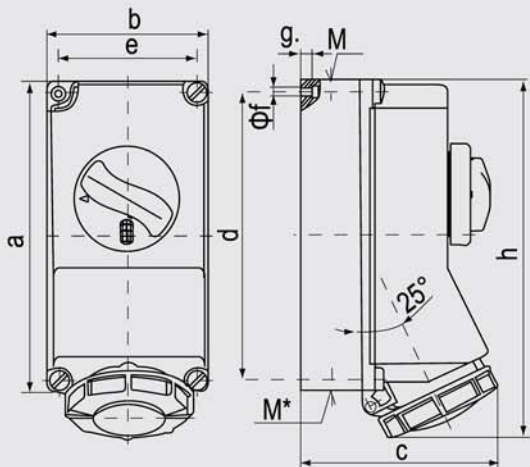

110 V 50 a. 60 Hz	230 V 50 a. 60 Hz	400 V 50 a. 60 Hz	500 V 50 a. 60 Hz	>50 - 500 V 100- 300 Hz	>50 - 500 V a. 300- 500 Hz
3P 4h	3P 6h	3P 9h	3P 7h	3P 10h	3P 2h
4P 4h	4P 9h	4P 6h	4P 7h	4P 10h	4P 2h
5P 4h	5P 9h	5P 6h	5P 7h	5P 10h	

选型
Description

⚡ IP67 CEE / IEC 插座，带开关，带机械联锁					
⚡ IP67 CEE / IEC Switched socket with mechanical interlock					
16	3	UKS-I136-4	UKS-I136-6	UKS-I136-9	UKS-I136-7
16	4	UKS-I146-4	UKS-I146-9	UKS-I146-6	UKS-I146-7
16	5	UKS-I156-4	UKS-I156-9	UKS-I156-6	UKS-I156-7
32	3	UKS-I236-4	UKS-I236-6	UKS-I236-9	UKS-I236-7
32	4	UKS-I246-4	UKS-I246-9	UKS-I246-6	UKS-I246-7
32	5	UKS-I256-4	UKS-I256-9	UKS-I256-6	UKS-I256-7
63	3	UKS-I336-4	UKS-I336-6	UKS-I336-9	UKS-I336-7
63	4	UKS-I346-4	UKS-I346-9	UKS-I346-6	UKS-I346-7
63	5	UKS-I356-4	UKS-I356-9	UKS-I356-6	UKS-I356-7

参数 Parameter	电流 (A) Current(A)		16			32			63		
	极数 (P) Pole (P)		3	4	5/7	3	4	5/7	3	4	5
尺寸 Dimension (mm)											
a			225	225	225	225	225	225	264	264	264
b			118	118	118	118	118	118	163	163	163
c			144	146	147	152	152	153	196	196	196
d			208	208	208	208	208	208	240	240	240
e			101	101	101	101	101	101	140	140	140
f			6.3	6.3	6.3	6.3	6.3	6.3	8.1	8.1	8.1
g			8	8	8	8	8	8	8	8	8
h			252	255	259	268	268	274	300	300	300
M			2x32	2x32	2x32	2x32	2x32	2x32	40	40	40
M*			2x25	2x25	2x25	2x25	2x25	2x25	2x40	2x40	2x40
最大电缆直径 (mm)			25	25	25	25	25	25	32	32	32
导线横截面积			1.5	1.5	1.5	2.5	2.5	2.5	6	6	6
从最小至最大			-4	-4	-4	-10	-10	-10	-25	-25	-25
Max cable diameter (mm)											
Conductor cross section (mm²)											
Min. - max.											

符合德国工业标准 DIN VDE 0623, 欧洲/国际标准 EN/IEC 60309-2
其它电压和频率的产品请来函询问

German industrial standard: DIN VDE 0623, European / International standard: EN / IEC 60309-2
Other requirements, please contact us freely